



Iron 3D Wire Bending Machine For Supermarket Storage Shelf Accessories

Our Product Introduction

for more products please visit us on wire-bendingmachine.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: JX3D2-6
- Minimum Order Quantity: 1 set
- Price: consult
- Packaging Details: Export wooden case
- Delivery Time: 5-10 days or negotiation
- Payment Terms: L/C, T/T
- Supply Ability: 20 Set/Sets per Month



Product Specification

- Product Name: 3D Wire Bending Machine
- Machine Type: 3D
- Control System: PLC+servo
- Applicable Industries: Hardware,wire Processing
- Warranty Of Core Components: 1 Year
- Wire Size: $\varnothing 2-6\text{mm}$
- No. Of Axis: 7 Axis
- Highlight: 3D Wire Bending Machine
- Automation: Automatic
- Port: Shenzhen
- Input Voltage: 380V50Hz
- Highlight: iron 3D Wire Bending Machine,
3D Wire Bending Machine Shelf Accessories



Product Description

3D Wire frame bending machine for Supermarket storage shelf accessories

This 3D molding machine is for iron wire with a diameter of 2-6mm

The biggest feature of this machine is that the iron wire rotates and the head is fixed

Technical Parameters

Model	JX3D-6	JX3D-8	JX3D-10
No. of axis	380V,7 axis	380V,7 axis	380V,7 axis
Machining wire diameter(MM)	Hard material $\Phi 2.0$ $\Phi 4.0$ Soft material $\Phi 2.0$ $\Phi 6.0$	Hard material $\Phi 3.0$ $\Phi 6.0$ Soft material $\Phi 3.0$ $\Phi 8.0$	Hard material $\Phi 3.0$ $\Phi 8.0$ Soft material $\Phi 3.0$ $\Phi 10.0$
Number of wire feeding wheels	3 groups	3 groups	3 groups
Spool servo motor (KW)	2	2.7	4.5
Head shaft servo motor (KW)	2	2.7	4.5
Cutter shaft servo motor(KW)	1	1	2
Lifting shaft servo motor (KW)	1	1	2
Angle axis servo motor (KW)	1	1	1
Machine size (MM)	3800X1860X1660	3800X1860X1660	3800X1860X1660

1. Computer control,

A. adopt speed closed-loop control; The maximum pulse frequency can reach 2MHz.

B system design integrated motherboard and IO board integrated design, simple wiring and simple installation.

C system is equipped with windows interface development. The operation interface is simple and fashionable. Like the operation mode of ordinary computers, the mouse and keyboard are used together to replace the traditional key operation, so as to reduce the risk of key aging and failure.

D. the speed can be modified at any time in the production process, which is easy to operate.


E simple and repeated programming action and probe make its production more accurate and stable, and the controller adopts high-speed probe

F-needle monitoring can respond immediately after 1US the probe is encountered, which can ensure the consistency of each product.



Bearing, gear and guide rail

Bearings and guide rails are high-quality brands of Jinri, with special treatment of gear high-frequency grinding, and the mechanical operation of the whole machine is durable and wear-resistant

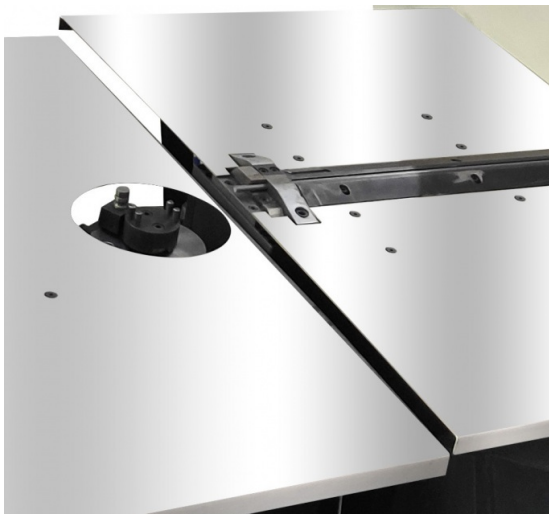

3D bending product display:

Supermarket shopping cart



2.5-8.0mm餐具置物篮



厨卫铁线成型



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China